

# Arrone AR800SA-SSS Floor spring (Complete)

An adjustable power unit which incorporates a proven cam action roller system combining smooth performance with reliability.

standards and certification

Quality & Performance: Successfully type tested for conformity to all the requirements of BS EN1154: 1997

384

11\*13

Manufactured by an ISO 9000 Registered Company

Fire Safety: Included in a successful fire test to BS EN1634 Part 1: 2000.

Assessed for use on 30 min, 1 hour & 2 hour fire doors

CE Marked: Declaration of conformity available on request

Certified Approved Product: Certificate CF495

Conformity Statement: These products can satisfy the opening force recommendations of BS8300 and Approved Document "M" and Approved Document M when fitted to a minimum door width of 826mm and has been 3rd party laboratory tested accordingly. However, consideration must be given to other installed hardware and differential air pressures within the building which can affect the overall performance of the closer.

features

- Adjustable power size 1-4 (max door width 1100mm/max door weight 300kgs)
- Closing Speed Adjustment Range: Adjustment can be made throughout whole of 360° range (180° for single action)
- Latch Adjustment Range: Latching action can be adjusted final 10° of closing
- Backcheck Range: Backcheck can be adjusted between 70° and 90° or deactivated
- Stand Open (optional extra): Doors will stand open 90°. This feature must not be used on fire resisting doors
- Gel packs for wet areas available

available kits:


- Single Action Unit Complete with Accessories Comprises: Mechanism, Floor Box, Accessory Pack and Cover Plate
- Double Action Unit Complete with Accessories Comprises: Mechanism, Floor Box, Accessory Pack and Cover Plate

finishes:

- Satin Stainless Steel, Polished Stainless Steel and Polished Brass

guarantee

- Supported by a 10 Year Guarantee

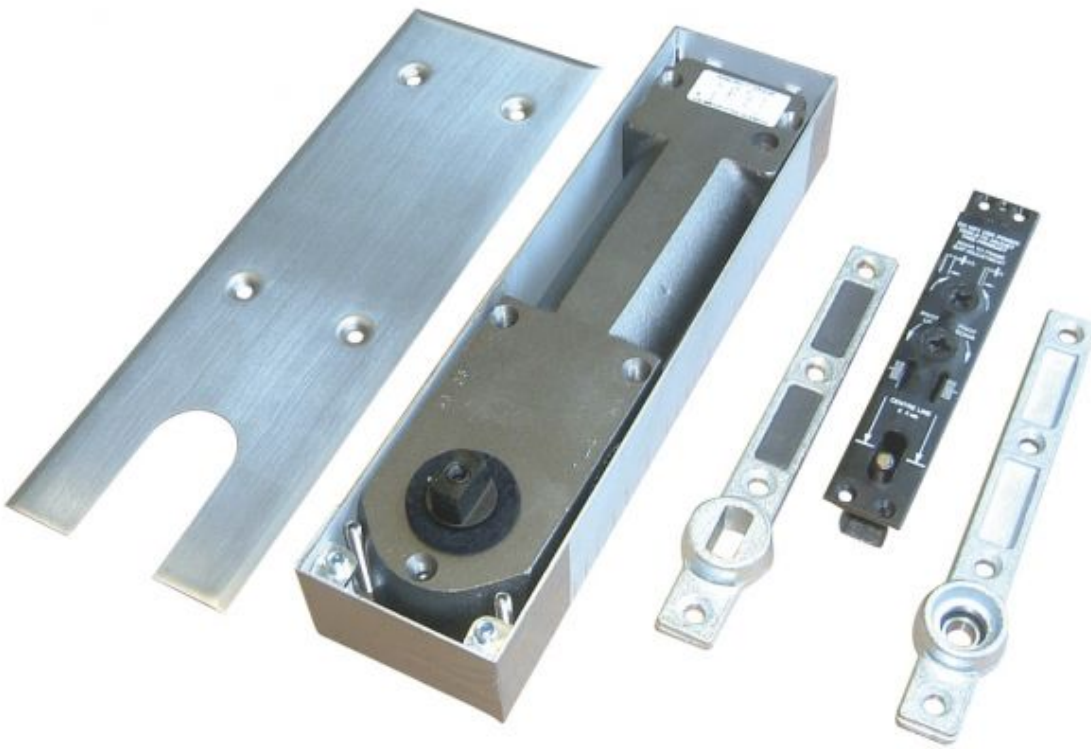

## Price

£210.00 (Product reference 1819-0)