



EXITEX ELAST-O-SEALANT® Whatever the Weather!

TECHNICAL DATA


- PRODUCT:** ► Elastic, solvent containing sealant, based on synthetic rubber. Silicone free.
- PROPERTIES:** ► Versatile application, high mould resistant, high elasticity - stretch up to 30%, paintable with most paints, adheres to most surfaces, can be overworked after curing, easy application. Weather and ageing resistant for lifelong protection.
- APPLICATION:** ► For expansion and connecting joints. For roofing, facades, glass, most polycarbonates*, kitchens and bathrooms etc. Adheres without primer to wood, concrete, metal (including copper and lead), glass, polycarbonate and many plastics - wet or dry.
* Approved by Macrolux.
- INSTRUCTIONS FOR USE:** ► The points of contact must be clean and solid. Store cartridges at room temperature before use. Smooth surfaces may be wet, porous ones should be dry. For final smoothing immediately use turps or soapy water. Joint edges can be taped. (Remove tape immediately after sealing). When used under water for a long time white Exitex Elast -O- Sealant may turn yellow, however this does not affect the quality of the material. Preliminary tests are recommended.
- PACKAGING:** ► 300ml Cartridges, 20 cartridges per carton, 60 cartons per pallet. REF: E.E.O.S.
- STORAGE:** ► Shelf life: Maximum 2 years at room temperature. Not exceeding 60° C, frost resistant.
- TECHNICAL DATA:** ►
Chemical Base: Synthetic rubber.
Viscosity: As Paste.
Consistency: Elastic.
Colours: White, Brown, Clear, Grey and Black. (Other colours on request-subject to quantity).
Density: 0.94g/cm³.
Permissible stress and strain: Max 30%. E-Module 100%: 0.5 N/mm.
Curing: By physical drying.
Volumn shrinkage: Approx 20%.
Shore A hardness: 25 + or - 5.
Application temperature: +5° C to +40° C.
Temperature resistance: -25° C to +100° C.
Smoothing Time: 0 - 5 minutes. Longer during inclement weather.
- PAINTABLE:** ► With commercial paints and varnishes. When using solvent containing paints drying of the sealant may be retarded. Preliminary tests necessary.
- CAUTION:** ► Keep away from sources of ignition. No smoking. Do not breathe vapour. Avoid contact with eyes. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. Keep out of reach of children.




Wet Surfaces




Guttering




Flashing Joints




Bitumen Products




Roof Glazing




Exterior



Sinks, Baths Showers etc.




Marine



Paintable

**The non-silicone sealant
with all the advantages**

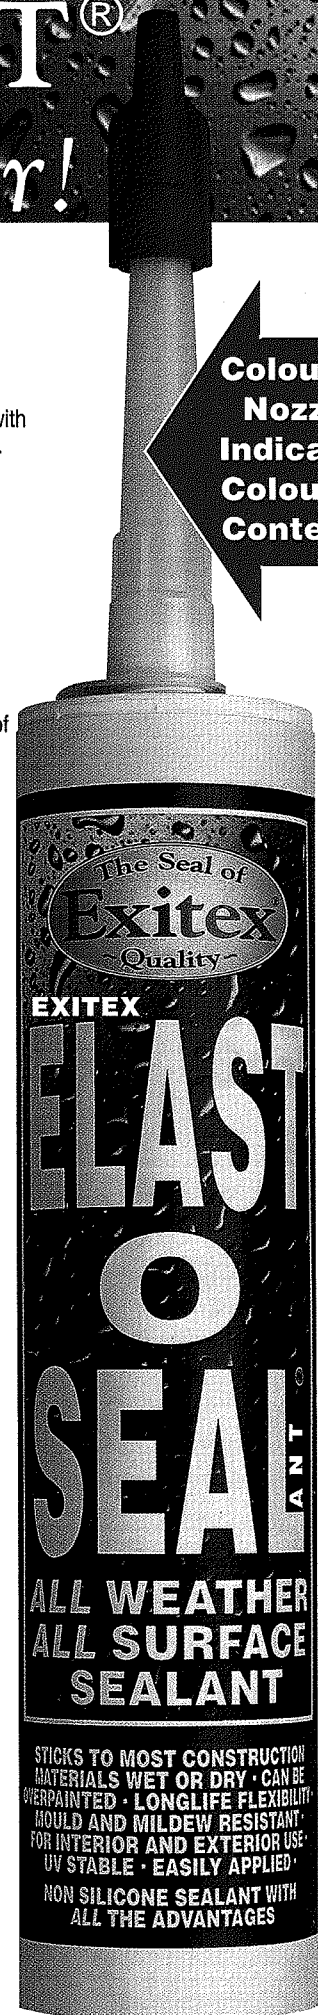

**Colour of
Nozzle
Indicates
Colour of
Contents**